

MALLINCAM XTREME QUICK GUIDE

WIRELESS SHUTTER CONTROLLER



Insert the receiver 4 pin plug into the side socket of the camera as shown in picture above and below

Add a picture



Next, connect the other end of the cable into the receiver as shown below



Next, turn on receiver by holding the left button called POWER for 3 to 4 seconds. The display will show either a blank channel or a channel number as shown in the picture below. You can change channel by pressing both buttons at the same time for 3 to 4 seconds until display flashes. Then select the channel of your choice.



Next, take the wireless hand controller and press any buttons to turn it on. The hand controller will show a channel on the display as shown below



Next, Press the left or right arrows to select CH in the upper display. Press center key located between the arrows until display flashes. Next select the channel number to match the receiver channel by pressing the up or down arrow. Press center key to lock the channel.



Next, press the right or left arrow until upper display indicate LONG as indicated by the picture above. This is where the integration time is entered. For this example, we will use 7 seconds integration


Press the center key located between the arrows until the last two digit flashes. Using the upper arrow, hit the upper arrow 7 times or hold down the upper arrow to scroll in fast mode to 7 seconds. Press center key to lock in value. Now display will look like picture below.



To activate the camera into 7 seconds integration with AUTO REFRESH, simply hit the upper right button which activate or stop the countdown as shown in picture below. Note the picture showing countdown to 2 seconds and will start over automatically to 7 seconds once the image has been taken and transferred to monitor.



To confirm image integration and or transfer, look at the receiver LED indicator in the picture below. When taking an exposure (integration) the LED on the receiver will be solid RED. Once the image is transferred, it will momentarily turn GREEN indicating image being transferred to monitor. The RED led will resume while taking another exposure (integration) automatically. This will repeat as long as the hand controller has been activated with the upper right button. To stop exposure simply press the upper right button on the hand controller.

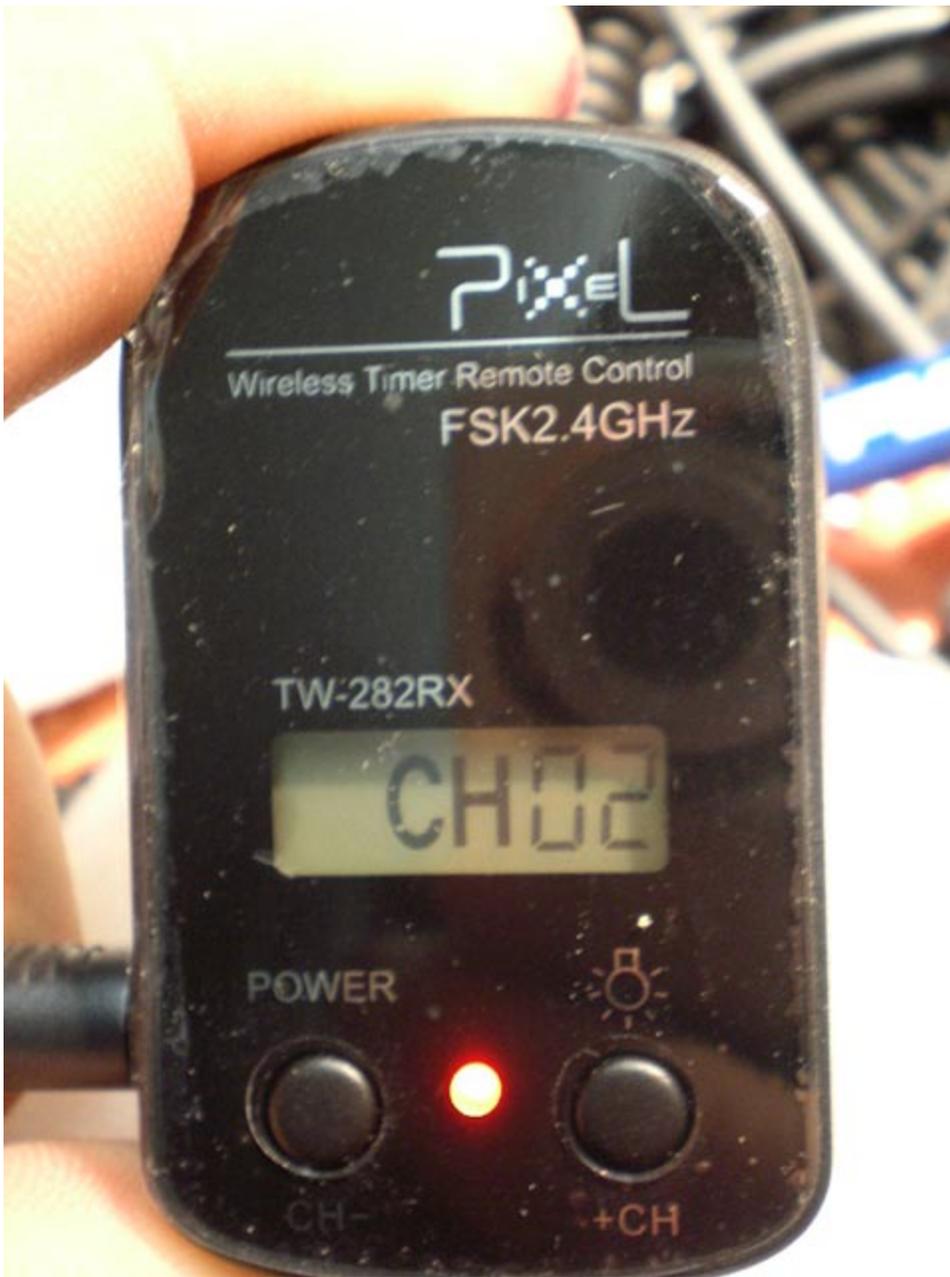

After the observing / imaging session, please remember to turn OFF the Receiver by pressing POWER for 4 seconds or until display goes blank. The hand controller will automatically shut down by itself in one minute. A light can be turned on momentarily by pressing the upper left button for 4 seconds or until display light comes on. It will turn off automatically after 6 seconds or more to save battery power. For long term storage, remove batteries from hand controller and receiver.